


1/2-13 UNC, 4 PLACES
1.10 DEEP MIN
ON 6.375 DIA. B.C.

5/8-11 UNC, 2 PLACES
1.10 DEEP MIN
ON 7.125 DIA. B.C.


PILOT DEPTH
0.55"

PILOT
Ø5.003
5.001

O'RING GROOVE
SIZED FOR
2-252 O'RING



3/8 NPT CASE DRAIN
2 @ 180 DEG APART

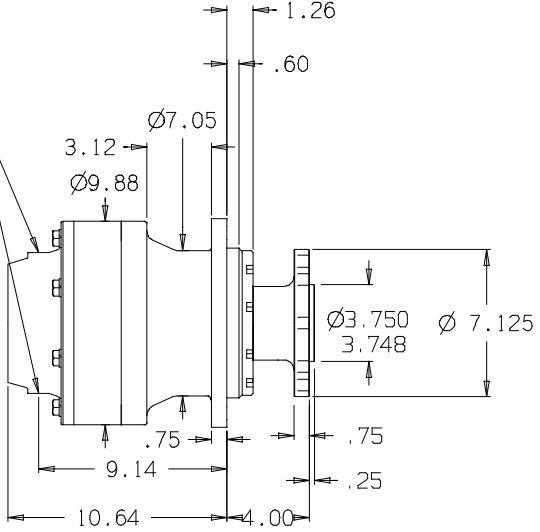


THRU HOLE
Ø.645/.655
12 HOLES EQ. SPACED
ON Ø8.750 B.C.

Ø7.249
7.245
PILOT

Ø.628
.625

THRU HOLES
8 PLACES
ON 6.0 DIA. B.C.

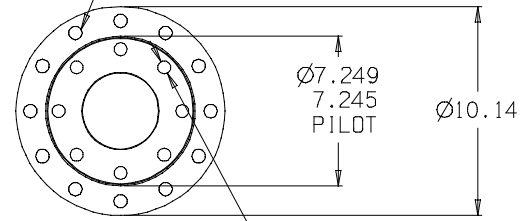

SUN GEARS- SUGGESTED MOTOR SHAFT LENGTHS			
SUN GEAR	SHAFT TYPE	MIN. (IN.)	MAX. (IN.)
20F	C/L 4000 BEARINGLESS	N/A	N/A
20G	C/L 6000 BEARINGLESS	N/A	N/A
20I	1 1/4" 14T SPLINE	1.97	2.32
-	-	-	-

©COPYRIGHT 2004, HECO GEAR, INC.

REV	DESCRIPTION	DATE	APPROVED
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

THIS DRAWING CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION OF HECO GEAR, INC. IN ACCEPTING THIS DRAWING, (CUSTOMER) ACKNOWLEDGES THE VALUE OF THE INTELLECTUAL PROPERTY CONTAINED HEREIN AND AGREES THAT THE INFORMATION IN THIS DRAWING IS THE PROPERTY OF AND PROPRIETARY TO HECO GEAR, INC. AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESS WRITTEN PERMISSION OF HECO GEAR, INC. ALL RIGHTS RESERVED.



2300 DEL MONTE STREET
WEST SACRAMENTO, CA 95811
(916)-372-9411 FAX (916)-373-0282

TITLE	MODEL 25 ASSEMBLY
DESCRIPTION	HECO 20 MODEL CODE: 25AF2 66*
SIZE	D
DRAWN BY	KSC
DATE	02/20/04
SCALE	DO NOT SCALE
REV	-
SHEET	1 OF 1

* RATIO DOES NOT CHANGE INSTALLATION DIMENSIONS