


Model 25 Series

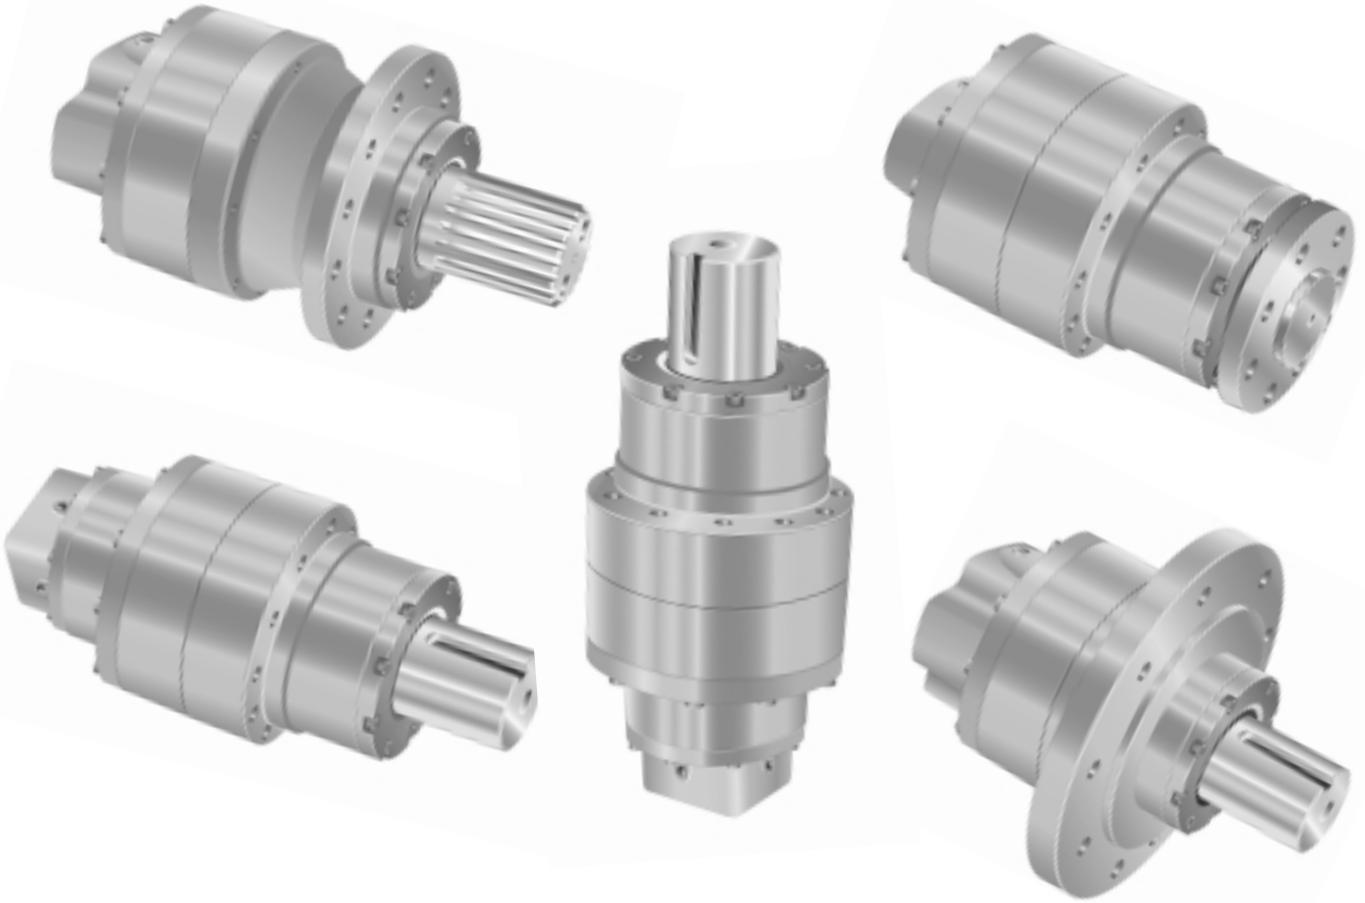

Model 25 Series Detail

Torque (in-lbs)**	Continuous	Model 25		85,000	Model 25D		
	Intermittent			110,000			
	Peak			135,000			
Radial Load (lbs)				30,000			
Max Speed (rpm)**	Output	250	250	95	75		
	Ratio	4.8	6.0	24.96	31.2		
	Input	1200	1500	2300	2300		

** Maximum speed reducer life in high torque applications will be achieved at lower output speeds. Conversely, maximum speed reducer life in high speed applications will be achieved at lower output torques.

Model 25 Series



Model 25 & 25D Series Detail

Torque (in-lbs)**	Continuous	85,000			
	Intermittent	110,000			
	Peak	135,000			
Radial Load (lbs)		30,000			
Max Speed (rpm)**	Output	250	250	95	75
	Ratio	4.8	6.0	24.96	31.2
	Input	1200	1500	2300	2300

** Maximum speed reducer life in high torque applications will be achieved at lower output speeds. Conversely, maximum speed reducer life in high speed applications will be achieved at lower output torques.